




material specification

ITEM	GEOBLOCK®5150	GEOBLOCK®2
Material	Up to 97% Recycled Polyethylene	
Color	Dark shades of gray to black	
Chemical Resistance	Superior	
Carbon Black for Ultraviolet Light Stabilization	1.5% - 2.0%	
Dimensions (width x length)	0.50 m x 1.00 m (20 in x 40 in)	
Nominal Unit Depth	50 mm (2 in)	30 mm (1.2 in)
Coverage Area	.50 m ² (5.38 ft ²)	
Cells per Unit	72	128
Cell Size	79 mm x 81 mm (3.1 in x 3.2 in)	57 mm x 57 mm (2.25 in x 2.25 in)
Top Open Area per Unit	87%	88%
Bottom Open Area per Unit	41%	56%
Interlocking Offset Shear Transfer Tabs	12 tabs per meter (40 in)	
Nominal Weight per Unit	4 kg (9 lb)	2.1 kg (4.7 lb)
Runoff Coefficient at 63.5 mm/hr (2.5 in) Rainfall	.15	
Units per Roll	50	92


FULL SIZE GEOBLOCK® UNIT:



GEOBLOCK® CELL AND INTERLOCKING OFFSET TAB:

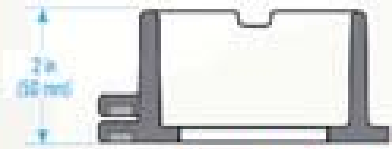

GEOBLOCK®5150



GEOBLOCK®2

Tecnoplásticos Lome S.A. de C.V.

Hermenegildo Galeana No. 130, Col. San Angel Inn, C. P. 01060 México, D. F.

Tels: 01 (55) 5550 6256, 5616 7790

LADA SIN COSTO 01 800 837 6266

E-mail: contacto@tecnoplásticoslome.com